


20591T ESP. H. 90° METR. PESADA PARA MANGUERA R1 - R2 - R12

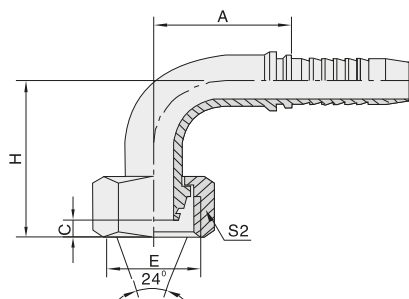

CÓDIGO	ROSCA FDHX H MÉTRICA P		DIÁMETRO INTERNO MANGUERA		DIMENSIONES MM			
	HILO (E)	TUBO	DN	ESPIGA	A	C	H	S2
20591-14-06	M14X1.5	6	10	3/8"	37	2	19	17
20591-16-04	M16X1.5	8	6	1/4"	37	2	19	19
20591-20-06	M20X1.5	12	10	3/8"	43	2.5	22	24
20591-20-08	M20X1.5	12	12	1/2"	43	2.5	22	24
20591-22-06	M22X1.5	14	10	3/8"	43	2.5	22	27
20591-24-10	M24X1.5	16	16	5/8"	51.5	3.5	26.5	30
20591T-14-03	M14X1.5	6	5	3/16"	37	2	19	17
20591T-14-04	M14X1.5	6	6	1/4"	28.5	2	33.5	17
20591T-14-06	M14X1.5	6	10	3/8"	37	2	19	17
20591T-16-04	M16X1.5	8	6	1/4"	28.5	2	33.5	19
20591T-16-05	M16X1.5	8	8	5/16"	30.5	2	36.5	19
20591T-18-04	M18X1.5	10	6	1/4"	30.5	3	35.5	22
20591T-18-05	M18X1.5	10	8	5/16"	30.5	3	35.5	22
20591T-18-06	M18X1.5	10	10	3/8"	34	3	36.5	22
20591T-20-05	M20X1.5	12	8	5/16"	34	2.5	42	24
20591T-20-06	M20X1.5	12	10	3/8"	34	2.5	42	24
20591T-20-08	M20X1.5	12	12	1/2"	34	2.5	42	24
20591T-22-05	M22X1.5	14	8	5/16"	34	2.5	42	27
20591T-22-06	M22X1.5	14	10	3/8"	34	2.5	42	27
20591T-24-06	M24X1.5	16	10	3/8"	42	3.5	48.5	30
20591T-24-08	M24X1.5	16	12	1/2"	42	3.5	48.5	30
20591T-30-10	M30X1.5	20	16	5/8"	51	3	57	36
20591T-36-12	M36X1.5	25	19	3/4"	65	3	71	41
20591T-36-16	M36X1.5	25	25	1"	65	3	71	41
20591T-42-16	M42X1.5	30	25	1"	69	5	77	50
20591T-52-20	M52X2.0	38	31	1 1/4"	83	6.5	92.5	60
20591T-52-24	M52X2.0	38	38	1 1/2"	94	6.5	102.5	60

NOTA:

20591 Se usa para mangueras con 1 y 2 mallas trenzadas.

20592 Se utiliza en mangueras con 4 capas espiraladas.