


87912 BRIDA CAT RECTA PARA MANG. R12 - 4SH - 4SP - 4SH

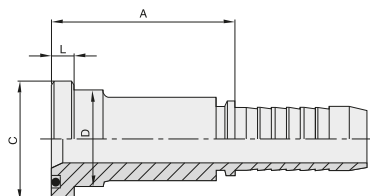


CÓDIGO	BRIDA		DIÁMETRO INTERNO MANGUERA			DIMENSIONES MM		
	FLC	BRIDA CAT	TALLA	DN	ESPIGA	A	D	L
87912-12-12	3/4"	41.3	-12	19	3/4"	51	31.5	14.3
87912-16-12	1"	47.6	-12	19	1"	55.5	38	14.3
87912-16-16	1"	47.6	-16	25	1"	55.5	38	14.3
87912-20-16	1 1/4"	54	-16	25	1 1/4"	65	42	14.3
87912-20-20	1 1/4"	54	-20	31	1 1/4"	65	42	14.3
87912-24-20	1 1/2"	63.5	-20	31	1 1/2"	75	50	14.3
87912-24-24	1 1/2"	63.5	-24	38	1 1/2"	75	50	14.3
87912-32-24	2"	79.4	-24	38	2"	84	61.5	14.3
87912-32-32	2"	79.4	-32	51	2"	85	61.5	14.3

NOTA:

87911 Se usa para mangueras con 1 y 2 mallas trenzadas.

87912 Se utiliza en mangueras con 4 capas espiraladas.

87942 BRIDA CAT 45° PARA MANGUERA R12 - 4SP - 4SH

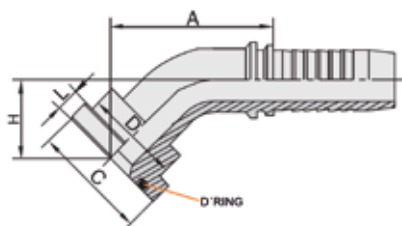

CÓDIGO	BRIDA		DIÁMETRO INTERNO MANGUERA			DIMENSIONES MM			
	FLC	BRIDA CAT	TALLA	DN	ESPIGA	A	D	H	L
87942-12-12	3/4"	41.3	-12	19	3/4"	41.3	32	29.5	14.3
87942-16-12	1"	47.6	-12	19	1"	71.5	38	35	14.3
87942-16-16	1"	47.6	-16	25	1"	71.5	38	35	14.3
87942-20-16	1 1/4"	54	-16	25	1 1/4"	85	42	41	14.3
87942-20-20	1 1/4"	54	-20	31	1 1/4"	85	42	41	14.3
87942-24-20	1 1/2"	63.5	-20	31	1 1/2"	88	51	44	14.3
87942-24-24	1 1/2"	63.5	-24	38	1 1/2"	91	51	47.5	14.3